rotronic

Datenblatt - Fiche technique - Data sheet

11.03.1559

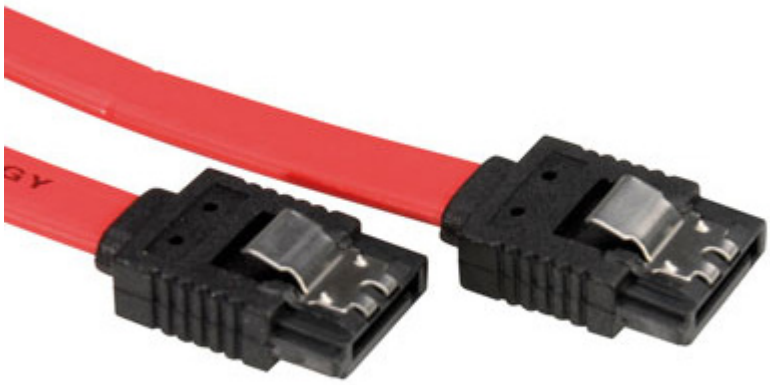

ROLINE Int. SATA 3.0 Gbit/s HDD-Kabel mit Schnappverschluss, 1,0m

ROLINE Câble SATA 3.0 Gbit/s interne avec attache, 1,0 m

ROLINE Internal SATA 3.0 Gbit/s Cable with Latch, 1 m

ROHS-COMPLIANT △1

LTR	REV.	DESCRIPTION	DATE
△5*2	F	ECR #080409-2 EDIT PACKING,ADD BAR CODE	04/09/08'
△6*2	G	ECR #080618-3 EDIT PACKING,ADD BARCODE NO.	06/18/08'

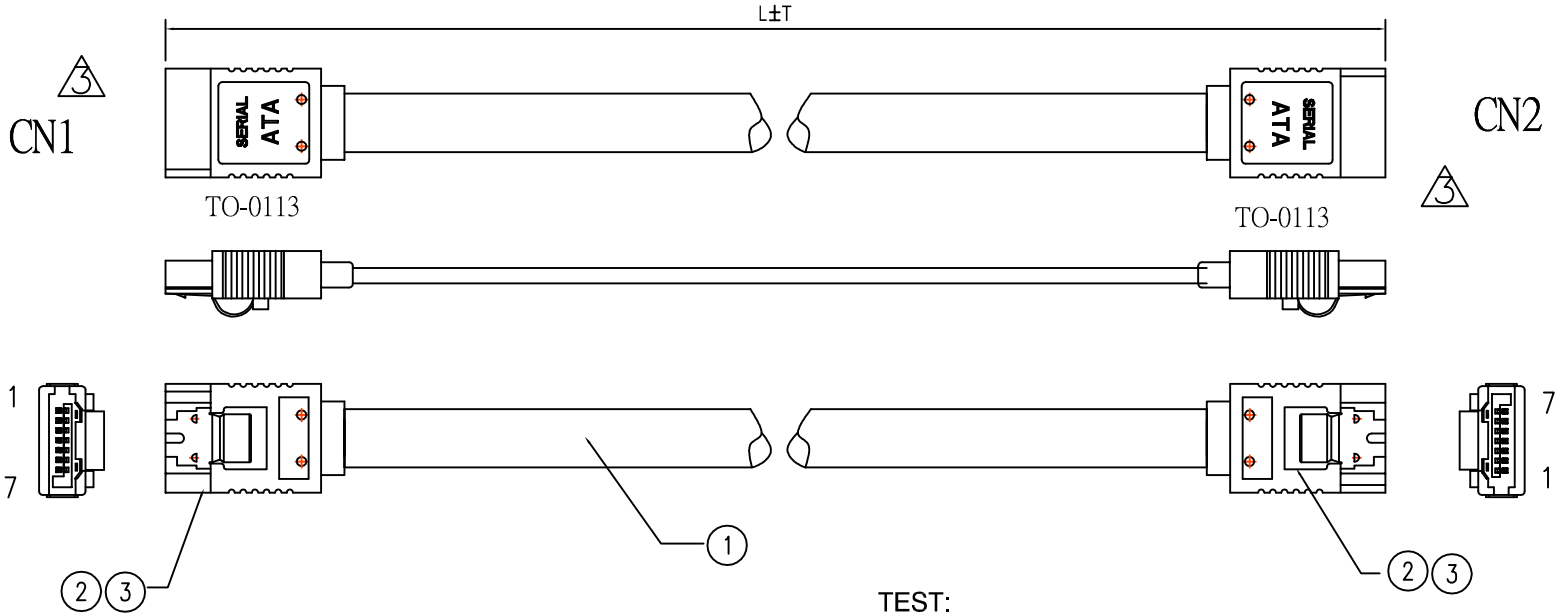

TEST:
1.100% OPEN & SHORT WITH MISS WIRE TEST
2.TEST CONDITION:
1).CONDUCTANCE RESISTANCE: 5 ohm.
2).SHORT OPEN DETERMINANT: 20K ohm.
3).INSULATION RESISTANCE: 5M ohm AT DC 300V.
3.PACKING: EACH PC / POLYBAG +HEADER CARD+BAR CODE LABEL.
△5 △7 △4 △6 50 PCS / CTN.

WIRING TABLE

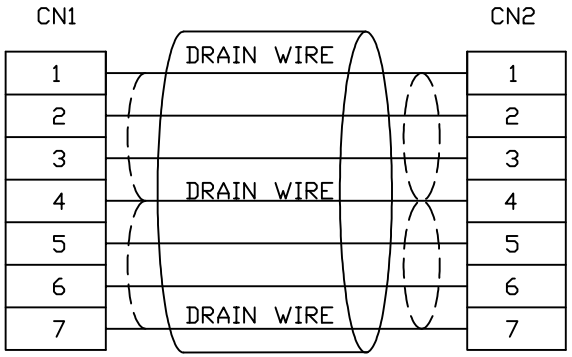

△5 △6

140-1265-2	11.03.1559-50	1000±20	7611990168514
140-1265-1	11.03.1554-50	500±10	7611990168507
DWG	P/N	L±T(mm)	BAR CODE NO.

ITEM	DESCRIPTION	Q'TY
3	OUTER MOLD:35P PVC BLACK	A/R
2	SATA 7F G/F BLACK, W/SPRING (WITH LATCH)	2SETS
1	UL2725(26AWG*2C+2D+AE)*2C OD:2.2*7.8MM RED(PANTONE 200C)	A/R

Tolerance Inch	M/M
.X ±.015	±.30
.XX ±.010	±.10
.XXX ±.005	±.05

Draw FANNIE 06/18/08'
Check
Engr

Rotronic Co., Ltd.

Title: SATA W/LATCH CABLE STRAIGHT TO STRAIGHT
Customer P/N:
App'd
Customer T-RAG
Scale NONE Units m/m Third Angle Projection
Dwg No. 140-1265 REV:G Sheet 1/1

E009 V0.1